


Cartridge Heater Lead and Lead Protection Options


leads

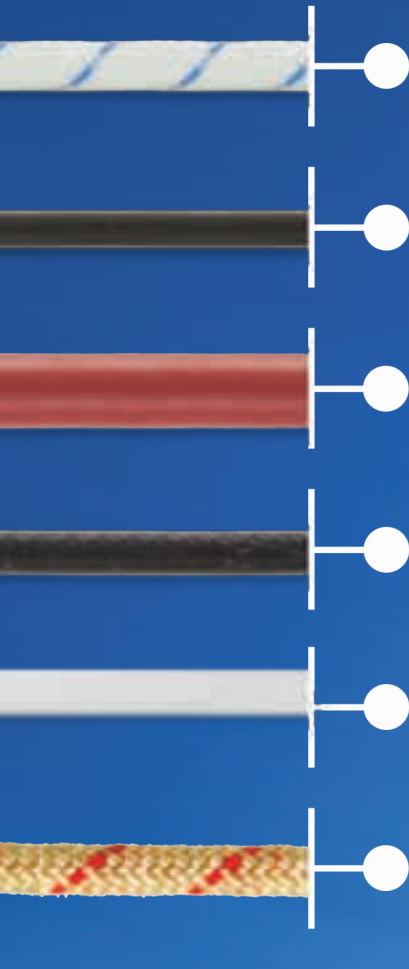

- Fiberglass (standard)**
Temperature UL Rated to
482 °F | 250 °C
- Silicone**
Temperature Rating
356 °F | 180 °C
- Silicone Cable**
Temperature Rating
356 °F | 180 °C
- Teflon®**
Temperature Rating
500 °F | 260 °C
- Teflon® (High Amperage)**
Temperature Rating
500 °F | 260 °C
- Fiberglass (High temp)**
Temperature Rating
932 °F | 500 °C

lead protection

Silicon Coated Fiberglass Sleeve

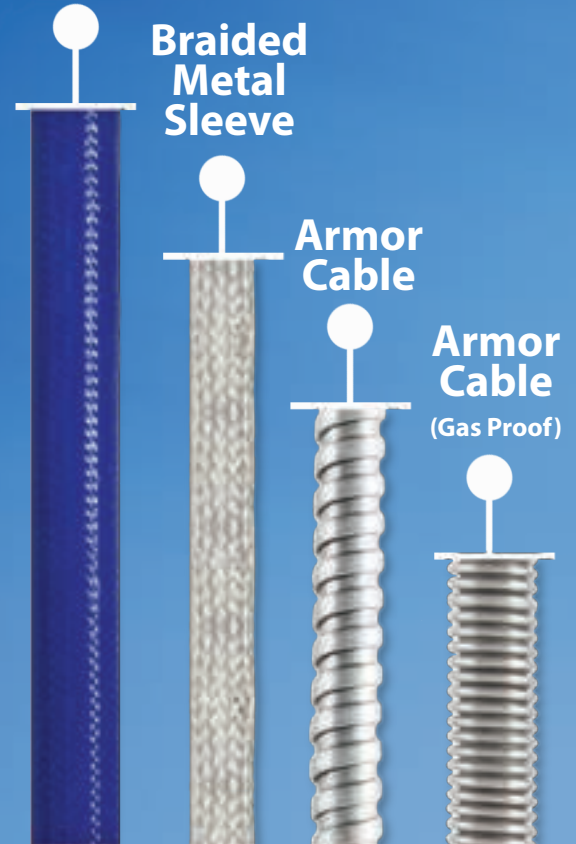

- Braided Metal Sleeve**
- Armor Cable**
- Armor Cable (Gas Proof)**

potting options

Ceramic

Temperature Rating
1000 °F | 538 °C



Epoxy

Temperature Rating
600 °F | 315 °C



Teflon® Plug

Temperature Rating
450 °F | 232 °C



Silicon

Temperature Rating
500 °F | 260 °C



Silicon (High Temp.)

Temperature Rating
650 °F | 343 °C

