

High Temperature Accessories

*This is not a comprehensive listing so if your solution is not listed please contact us

High-Temperature Lead Wire

Certification: UL/CSA - Industrial
Temperature Rating: 450°C UL (non-UL 538°C)
Voltage Rating: 600V
Conductor: 27% Nickel Plated Copper
Insulation: Glass Reinforced Mica
Jacket: Glass Braid

Part Number	Gauge Size	Nominal Diameter	Weight (lbs./1000ft)
MG1000-18	18	.115	12
MG1000-16*	16	.125	16
MG1000-14*	14	.140	23
MG1000-12*	12	.160	31
MG1000-10	10	.210	52
MG1000-8	8	.265	78

* - also manufactured with 3 & 4 conductor options



High-Temperature Lead Wire

Certification: UL/CSA
Temperature Rating: 250°C
Voltage Rating: 600V
Conductor: Nickel Plated Copper
Insulation: Teflon, Double Fiberglass Wrap
Jacket: Glass Braid

Part Number	Gauge Size	Nominal Diameter	Weight (lbs./1000ft)
TKGT-18	18	.078	9
TKGT-16	16	.092	15
TKGT-14*	14	.113	20
TKGT-12*	12	.127	30
TKGT-10	10	.155	45
TKGT-8	8	.210	72

* - also manufactured with 3 & 4 conductor options

High Temperature Accessories

*This is not a comprehensive listing so if your solution is not listed please contact us


Terminals

Part Number	Wire Size – Gauge	Stud Size	Material	Temperature Rating
R3423	12-10	10	Nickel plated Steel	900° F
R3422	12-10	8	Nickel plated Steel	900° F
R3424	12-10	¼"	Nickel plated Steel	900° F
400-410-22	18-22	10	Nickel plated Steel	900° F
403-410-22 (spade)	18-22	10	Nickel plated Steel	900° F

Ceramic Wire Nuts:

- Rated at 300v & 2000° F

Part Number	Wire Size – Gauge
CN1822	18-22
CN1618	16-18
CN1416	14-16
CN1012	10-12

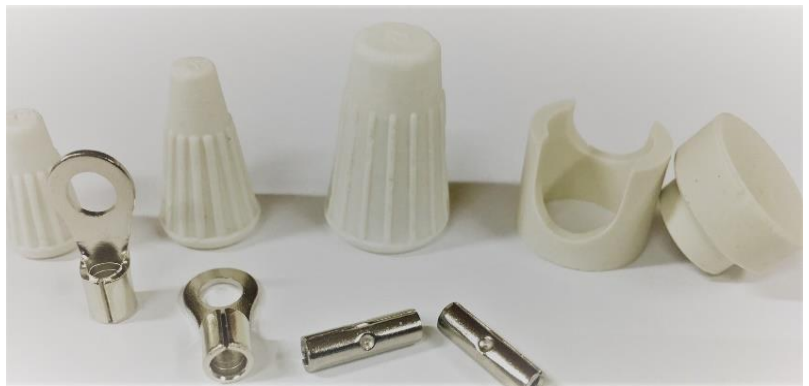

Ceramic Terminal Covers

Part Number	Ceramic Base & Cap Thread Size
MC1032	10-32
MC1024	10-24

Butt Splices

Part Number	Wire Size – Gauge	Material	Temperature Rating
B1845	16-14	Nickel plated Steel	900° F
B1840	12-10	Nickel plated Steel	900° F

Sleeving

204-003	¼" silicon/glass coated
204-440	½" silicon/glass coated



Tape

Cloth Tape	MT-27	1" wide x 180 ft.	Rated @ 250°F
Aluminum Tape	AAT-260	2" wide x 180 ft.	Rated @ 250°F